
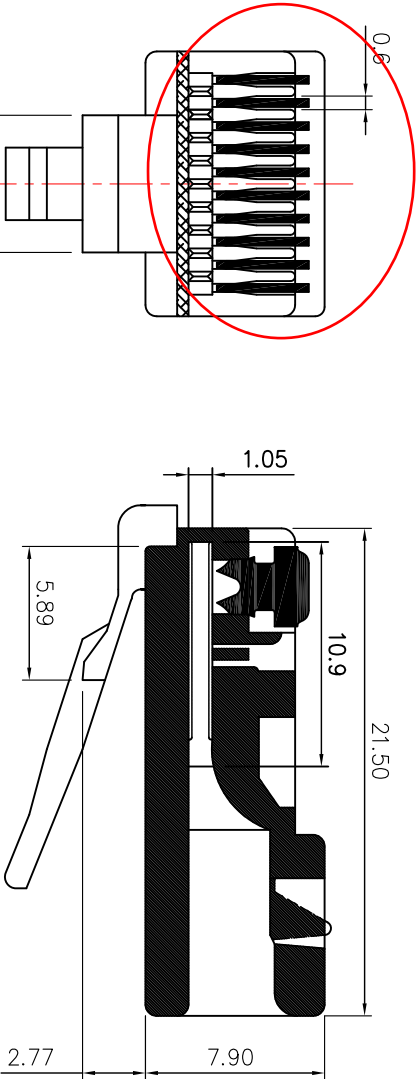


REV.	DESCRIPTION	DATE

NOTE:

- A. Material:
1. Housing : PC , UL94V-2 / UL94V-0.
2. Terminal : Copper Alloy.
- B. Plating:
1.Terminal : Plating is based on 50u" Nickel Under Plating.
Selective Gold Plated on Contact Touch Area.
C. Applicable Wire Gauge : 24~26AWG OD:5~6mm
D. Operation Temperature : -40°C to 125°C

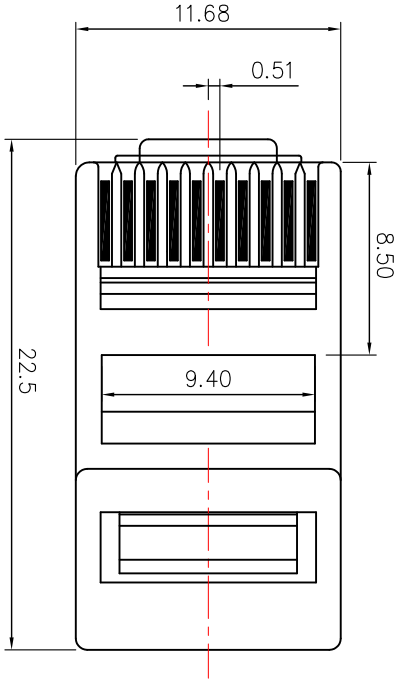

Round Cable


MOD - 8AXXA - R - XXu" - V

Terminal Type :
1: 2 Prongs
3: 3 Prongs

Cable Type :
R: Round Cable

Plating Option :
GFn"
6u"
15u"
30u"
50u"

UL94V-0

		13u" 30u" 50u"																								
TREMINAL																										
	2 Prongs For Stranded Wire 多芯線用二叉金片	2 Prongs For Solid Wire 單芯線用二叉金片	3 Prongs For Solid Wire 單芯線用三叉金片																							
	<table><tr><td colspan="2">TOLERANCE</td><td>DRAWER</td></tr><tr><td>.X ±0.250</td><td>CHECK</td><td>Chin Chuan Yiu</td></tr><tr><td>.XX ±0.150</td><td>DESIGNED</td><td>Shi Tsung Yiu</td></tr><tr><td>.XXX±0.100</td><td>APPROVAL</td><td>Chin Chuan Yiu</td></tr><tr><td colspan="2">UNITS : mm</td><td>DATE</td></tr><tr><td colspan="2">3 : 1</td><td>3 / 17 / 2016</td></tr><tr><td colspan="2">SCALE</td><td>SHEET</td></tr><tr><td colspan="2">3 : 1</td><td>1 OF 1</td></tr></table>			TOLERANCE		DRAWER	.X ±0.250	CHECK	Chin Chuan Yiu	.XX ±0.150	DESIGNED	Shi Tsung Yiu	.XXX±0.100	APPROVAL	Chin Chuan Yiu	UNITS : mm		DATE	3 : 1		3 / 17 / 2016	SCALE		SHEET	3 : 1	
TOLERANCE		DRAWER																								
.X ±0.250	CHECK	Chin Chuan Yiu																								
.XX ±0.150	DESIGNED	Shi Tsung Yiu																								
.XXX±0.100	APPROVAL	Chin Chuan Yiu																								
UNITS : mm		DATE																								
3 : 1		3 / 17 / 2016																								
SCALE		SHEET																								
3 : 1		1 OF 1																								
		 日亮電子科技有限公司 Sun-Light Electronic Technologies Inc.																								
		NAME Modular Plug RJ48 8P10C Standard Type																								
		PART NO. MOD-8AXXA-R-XXu"																								
		DRAW NO. MOD-8AXXA																								
		REV. A																								

TREMINAL	2 Prongs For Stranded Wire 多芯線用二叉金片	2 Prongs For Solid Wire 單芯線用二叉金片	3 Prongs For Solid Wire 單芯線用三叉金片
----------	--	-------------------------------------	-------------------------------------