


REV.	DESCRIPTION	DATE

Material:


- Housing: Nylon-66, UL94V-0.
- Terminal: Copper alloy. Tin-plated.

Electrical:


- Current rating : 1A AC,DC.
- Voltage rating : 100V AC,DC.
- Temperature range : -25°C to +85°C.
- Contact resistance: 20mΩ max.
- Insulation resistance: 500MΩ min.
- Withstanding voltage: 500V AC/minute.

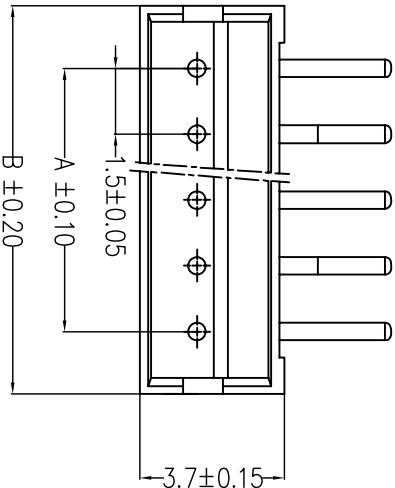

5P (含5P) 以上打 K


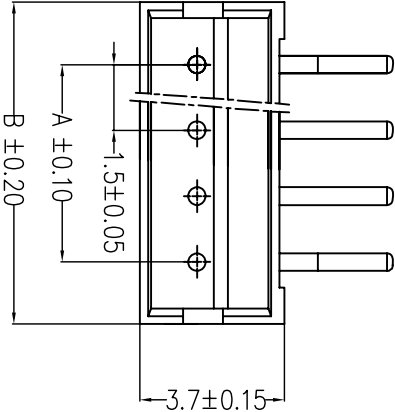


4P (含4P) 以下打 K

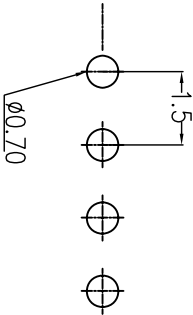

PCB Hole Layout

Circuits	Dimensions	
	A (mm)	B (mm)
02P	1.50	4.50
03P	3.00	6.00
04P	4.50	7.50
05P	6.00	9.00
06P	7.50	10.50
07P	9.00	12.00
08P	10.50	13.50
09P	12.00	15.00
10P	13.50	16.50
11P	15.00	18.00
12P	16.50	19.50
13P	18.00	21.00

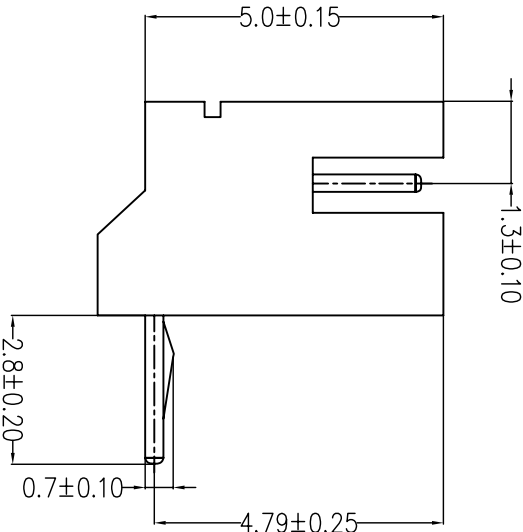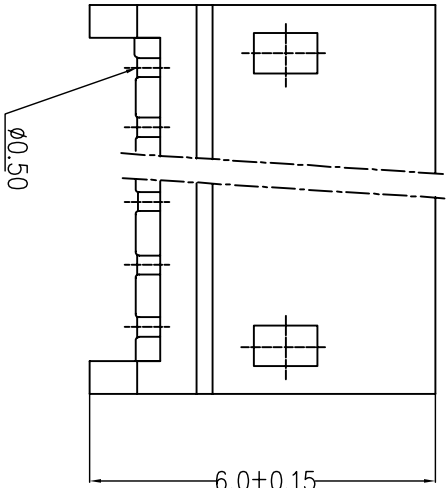

TOLERANCE .X ±.20 .XX ±.15 .XXX ±.10	DRAWER <i>Chiu Chuan Yiu</i>	NAME SynLight 日亮電子科技有限公司 <i>Sun-light Electronic Technologies Inc.</i>
	CHECK <i>Shi Jiong Yiu</i>	
	DESIGNED <i>Chiu Chuan Yiu</i>	
UNITS : mm	APPROVAL <i>Shau Teng Yiu</i>	1.5mm Wafer 90°
	DATE 12 / 10 / 2010	
	SCALE FREE	
PART NO. WTBP-P15R-XX		DRAW NO. WTBP-P15R
SIZE A4		REV. A
SHEET 1 OF 1		