

REV.	DESCRIPTION	DATE


Note:

Material:




1. Housing: Nylon-66, UL94V-0.
2. Terminal: Copper alloy. Tin-plated.

Electrical:

1. Current rating: 2A AC,DC
2. Voltage: 100V AC,DC
3. Contact resistance: 30mΩ Max
4. Insulation resistance: 1000MΩ Min
5. Withstanding voltage: 800V AC/min.
6. Temperature: -25°C ~ +85°C

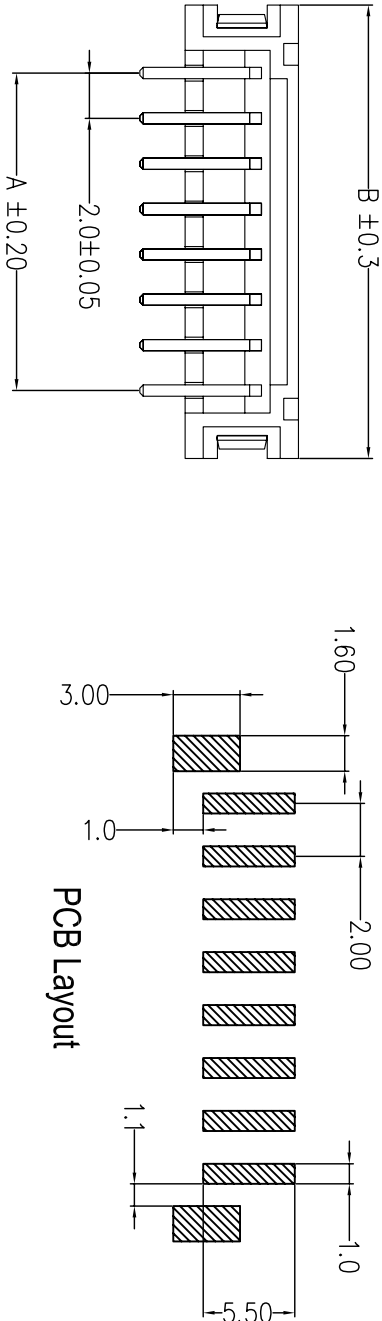

PCB Layout

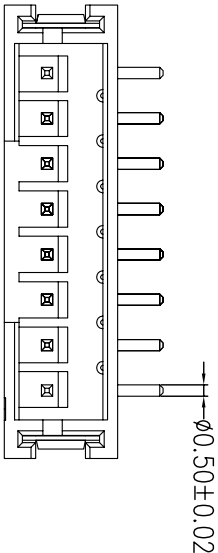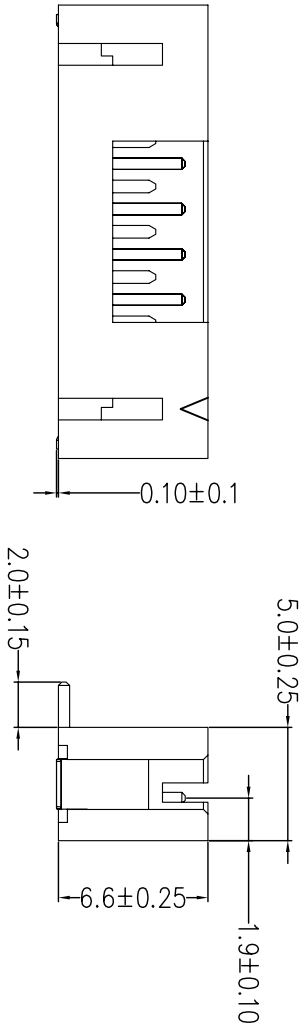

Circuits	Part No	Dimension mm	
		A	B
02	WTB-P20-SMT-02	2.0	8.0
03	WTB-P20-SMT-03	4.0	10.0
04	WTB-P20-SMT-04	6.0	12.0
05	WTB-P20-SMT-05	8.0	14.0
06	WTB-P20-SMT-06	10.0	16.0
07	WTB-P20-SMT-07	12.0	18.0
08	WTB-P20-SMT-08	14.0	20.0
09	WTB-P20-SMT-09	16.0	22.0
10	WTB-P20-SMT-10	18.0	24.0
11	WTB-P20-SMT-11	20.0	26.0
12	WTB-P20-SMT-12	22.0	28.0
13	WTB-P20-SMT-13	24.0	30.0
14	WTB-P20-SMT-14	26.0	32.0
15	WTB-P20-SMT-15	28.0	34.0
16	WTB-P20-SMT-16	30.0	36.0

TOLERANCE .X ± .20 .XX ± .15 .XXX ± .10	DRAWER <i>Chiu Chuan Yiu</i>	 日亮電子科技有限公司 <i>Sun-light Electronic Technologies Inc.</i>	
	CHECK <i>Mhi Tung Yiu</i>		
	DESIGNED <i>Chiu Chuan Yiu</i>		
 UNITS : mm	APPROVAL <i>Shau Tong Yiu</i>	NAME 2.0mm Wafer 180° SMT type $\phi=0.50$	
	DATE 12 / 10 / 2010		
	SCALE FREE		
SIZE A4		PART NO. WTB-P20-SMT-XX	DRAW NO. WTB-P20-SMT
SHEET 1 OF 1		REV. A	