
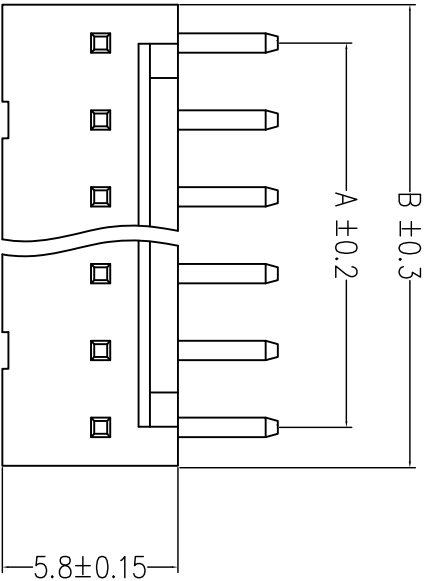
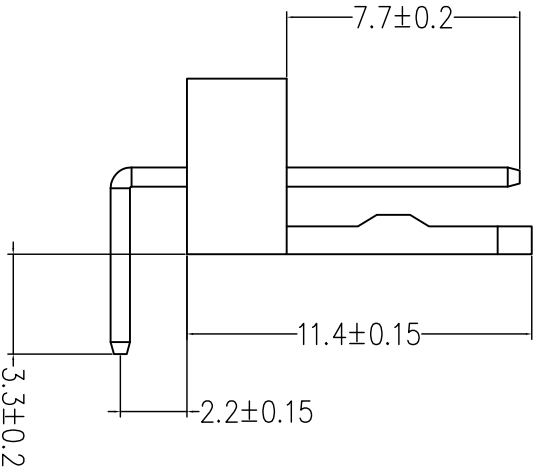


PCB Hole Layout

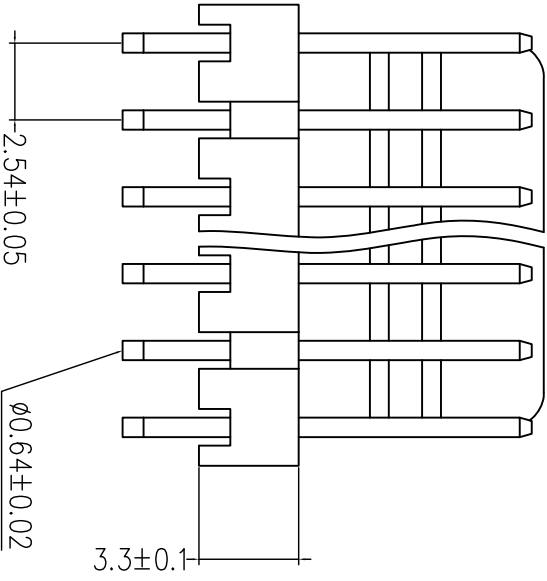

Circuits	Dimension mm		Circuits	Dimension mm	
	A	B		A	B
02	2.54	5.08	12	27.94	30.48
03	5.08	7.62	13	30.48	33.02
04	7.62	10.16	14	33.02	35.56
05	10.16	12.70	15	35.56	38.10
06	12.70	15.24	16	38.10	40.64
07	15.24	17.78			
08	17.78	20.32			
09	20.32	22.86			
10	22.86	25.40			
11	25.40	27.94			

REV.	DESCRIPTION	DATE

Note:
Material:

1. Housing: Nylon-66, UL94V-2.
2. Color: Beige.
3. Terminal: Copper alloy, Tin-plated.

Electrical:

1. Current rating: 4A AC,DC
2. Voltage: 250V AC,DC
3. Contact resistance: 20mΩ Max
4. Insulation resistance: 1000MΩ Min
5. Temperature: -25°C ~ +85°C

TOLERANCE		DRAWER		Sunlight 日亮電子科技有限公司 Sun-light Electronic Technologies Inc.	
X ±X.XX	CHECK	Qilin Qian Yin	Qilin Qian Yin		
XX ±X.XX	DESIGNED	Shi Jiong Yin	Shi Jiong Yin	NAME 2.54mm Wafer 90°	
XXX ±X.XX	APPROVAL	Qilin Qian Yin	Qilin Qian Yin		
UNITS : mm		DATE	PART NO.	DRAW NO.	
SCALE		10 / 13 / 2011	WTB-P254R-XX	WTB-P254R	
FREE		SIZE	A4	SHEET	
				1 OF 1	
				REV.	
				A	