

REV.	DESCRIPTION	DATE


Note:

Material:



- 1. Housing: Nylon-66, UL94V-2.
- 2. Color: Ivory-white.
- 3. Terminal: Copper alloy. Tin-plated.

Electrical:


- 1. Current rating: 5A AC,DC
- 2. Voltage: 250V AC,DC
- 3. Contact resistance: 20mΩ Max
- 4. Insulation resistance: 1000MΩ Min
- 5. Temperature: -25°C ~ +85°C

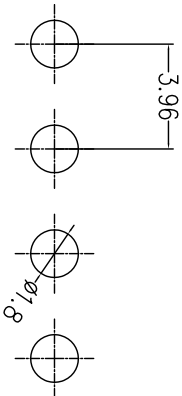

PCB Hole Layout

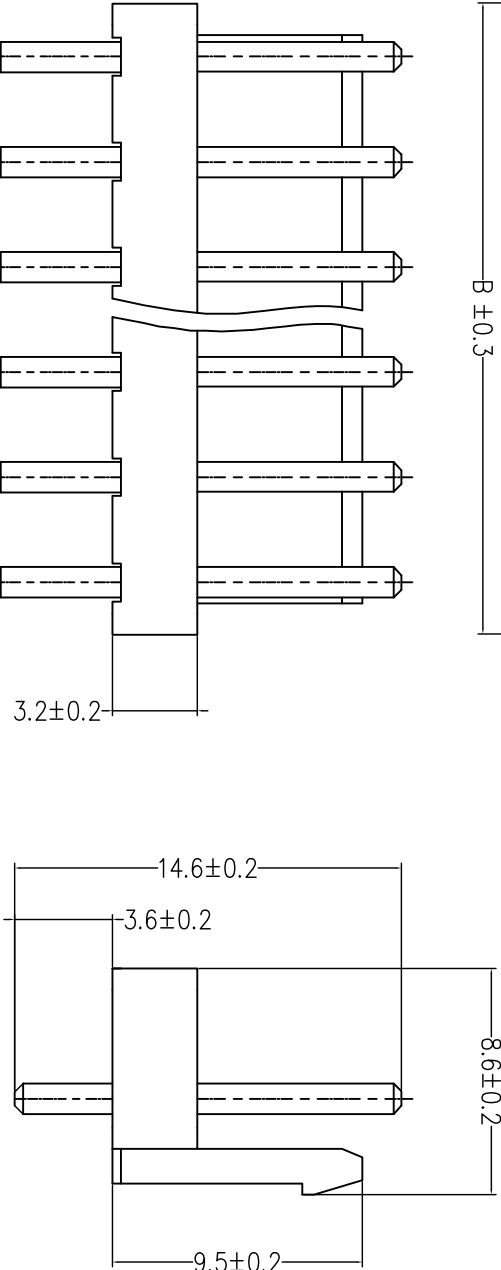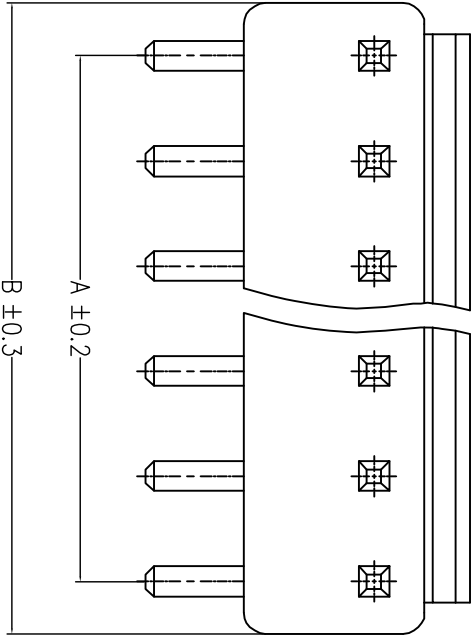

Circuits	Dimension mm		Circuits	Dimension mm	
	A	B		A	B
02	3.96	7.92	12	43.56	47.52
03	7.92	11.88	13	47.52	51.48
04	11.88	15.84	14	51.48	55.44
05	15.84	19.80	15	55.44	59.40
06	19.80	23.76			
07	23.76	27.72			
08	27.72	31.68			
09	31.68	35.64			
10	35.64	39.60			
11	39.60	43.56			

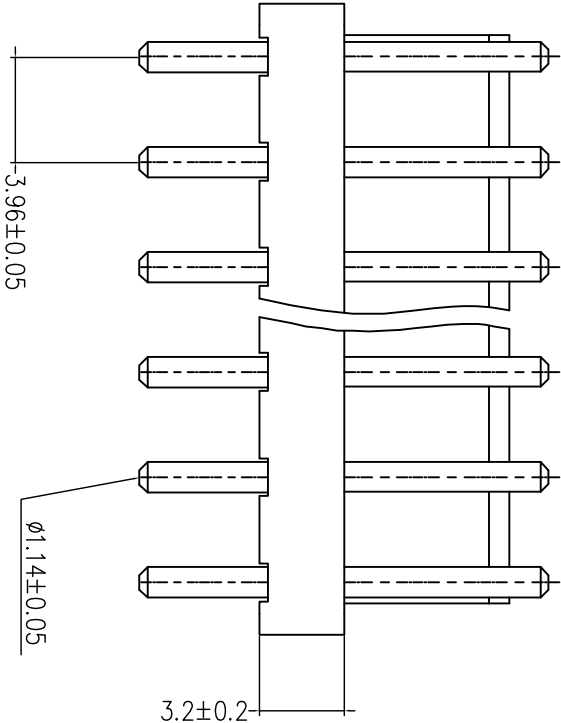

TOLERANCE		DRAWER	Sunlight 日亮電子科技有限公司 Sun-light Electronic Technologies Inc.		
.X	± X.XX				
XX	± X.XX	CHECK Shi-Tung Yiu	NAME VH 3.96mm Wafer 180°		
XXX	± X.XX	DESIGNED Chiu Chiu Yiu			
		APPROVAL Shaw-Tung Yiu	PART NO. WTBP-P3961-XX		
		DATE 10 / 28 / 2011			
UNITS : mm		SCALE FREE	SIZE A4		SHEET 1 OF 1
				REV.	A