

REV.	DESCRIPTION	DATE



Material:

- 1.Housing: Polyester. UL94V-0.
- 2.Terminal: Copper alloy. Gold-plated.


Electrical:

- 1.Current rating: 2 Amp.
- 2.Contact resistance: 30mΩ Max
- 3.Insulator resistance: 3000MΩ Min.
- 4.Dielectric withstanding: AC 500V.
- 5.Operating temperature: -40° ~ +105°

Available pins: 02~50 contacts

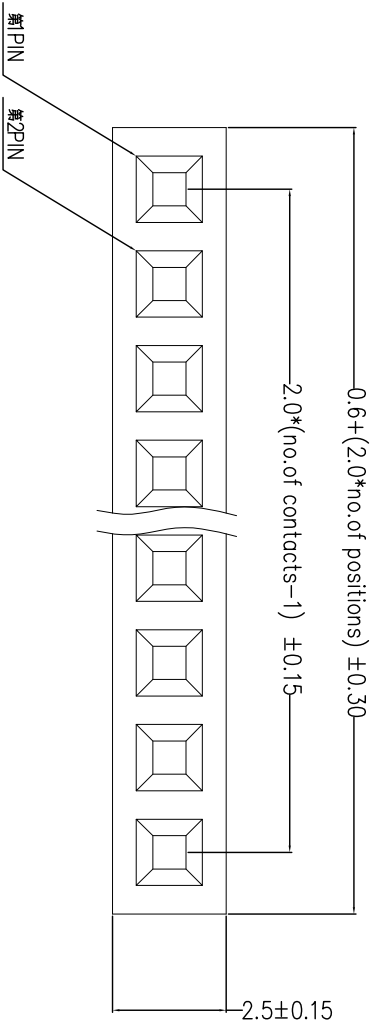

PCB Layout

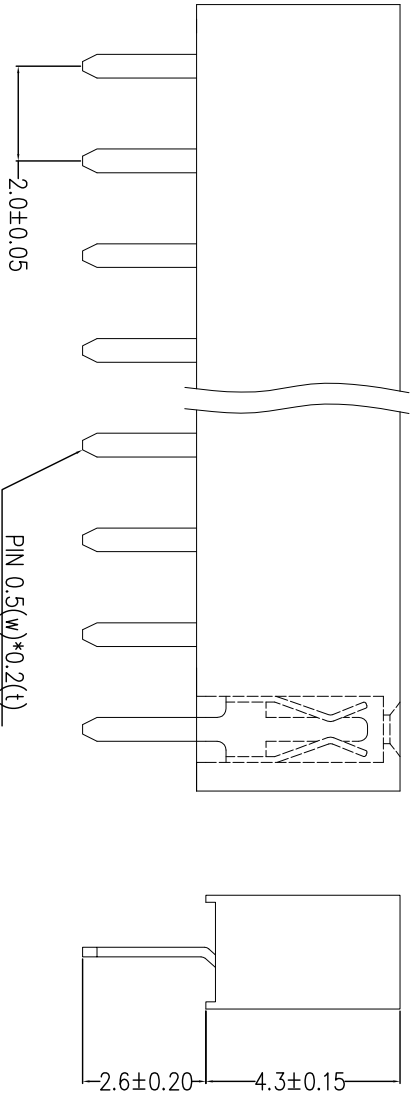

TOLERANCE X ±.XXX .XX ±.XXX .XXX ±.XXX	DRAWER <i>Chiu Chuan Siu</i>	NAME SynLight 日亮電子科技有限公司 <i>Sun-Light Electronic Technologies Inc.</i>
	CHECK <i>Mhi Tsung Siu</i>	
	DESIGNED <i>Chiu Chuan Siu</i>	
 UNITS : mm	APPROVAL <i>Miao Tsung Siu</i>	2.0mm Female Header H:4.3mm W:2.5mm 180° 單排 Single row
	DATE 12 / 10 / 2010	PART NO. F200-H43-SDIP-XX
	SCALE FREE	SHEET 1 OF 1
SIZE A4		DRAW NO. F200-H43-SDIP
		REV. A