

REV.	DESCRIPTION	DATE

NOTE:


Material:

- 1.Housing: Polyester, UL94V-0.
- 2.Terminal: Copper alloy. Gold-plated.


Electrical:

- 1.Current rating: 1 Amp.
- 2.Contact resistance: 30mΩ Max.
- 3.Insulator resistance: 5000MΩ Min.
- 4.Dielectric withstanding: AC 500 V.
- 5.Temperature: -40℃ ~ +105℃




Available pins: 02~50 contacts




AT Type

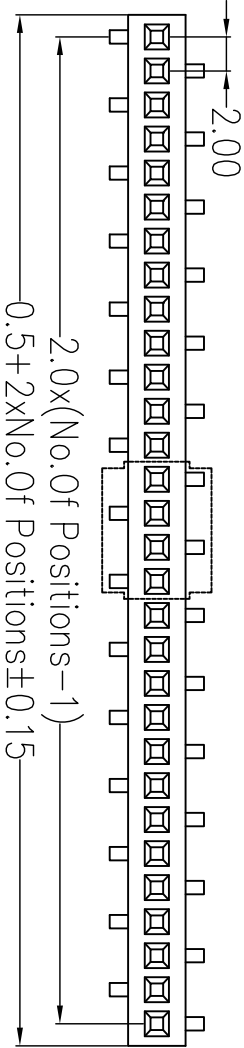

BT Type

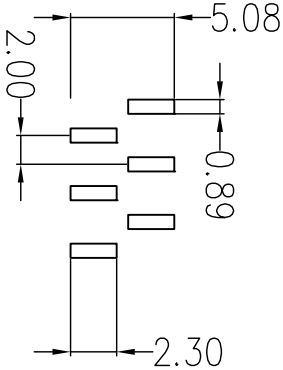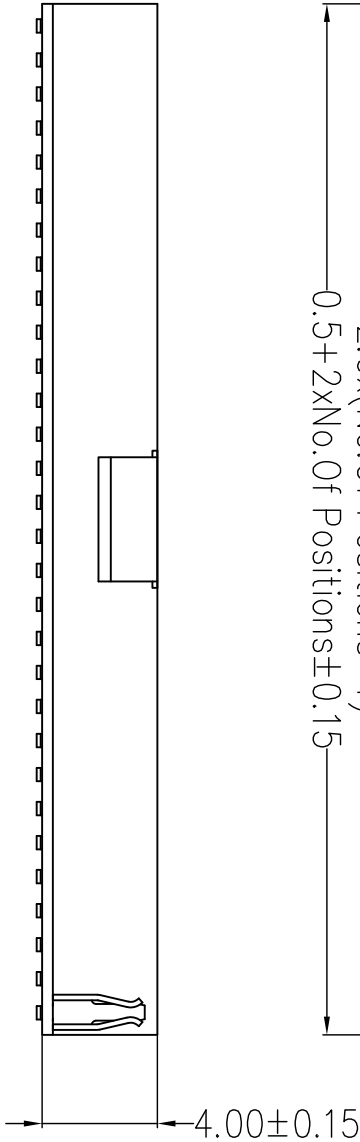

AT Type



BT Type

Recommended PCB Layout

	TOLERANCE		DRAWER
	.X ±.XX		<i>Chiu Chiu Yiu</i>
	.XX ±.XX		<i>Shi Tung Yiu</i>
	.XXX ±.XX		DESIGNED
			<i>Chiu Chiu Yiu</i>
			APPROVAL
			<i>Shue Tung Yiu</i>
			DATE
			10 / 23 / 2010
SCALE	FREE	SIZE	A4
		SHEET	1 OF 1
		REV.	A



日亮電子科技有限公司
Sun-light Electronic Technologies Inc.

2.0mm Female Header H4.3 SMT type 單排

PART NO. F200-H43-SSMT-XI-XX

DRAW NO. F200-H43-SSMT