

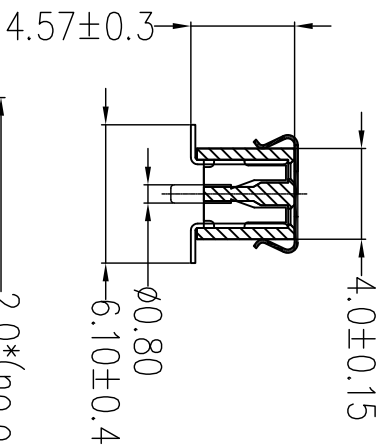
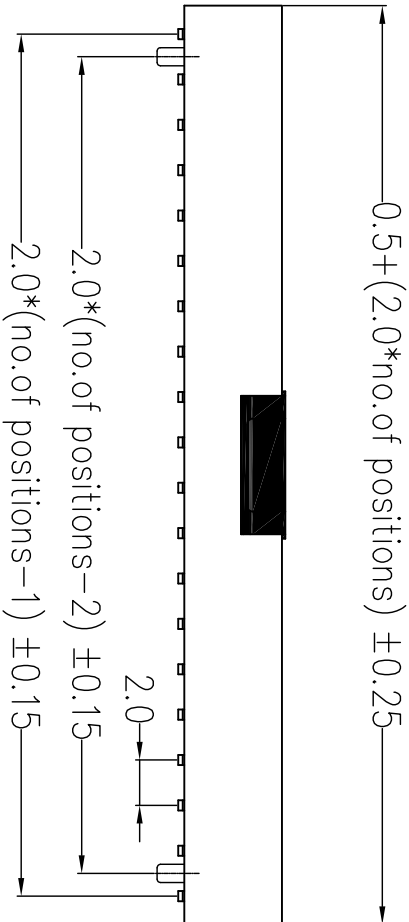


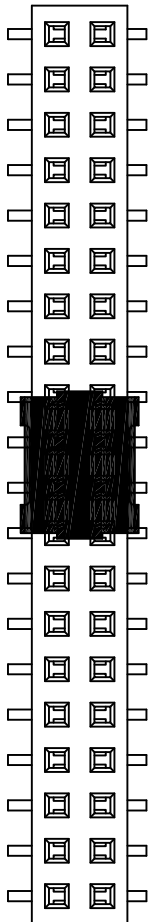

NOTE:
Material:
1.Housing: Polyester, UL94V-0.
2.Terminal: Copper alloy. Gold-plated.

Electrical:
1.Current rating: 2 Amp.
2.Contact resistance: 30mΩ Max.
3.Insulator resistance: 3000MΩ Min.
4.Dielectric withstanding: AC 500 V.
5.Temperature: -40°C ~ +105°C

Available pins: 06~100 contacts

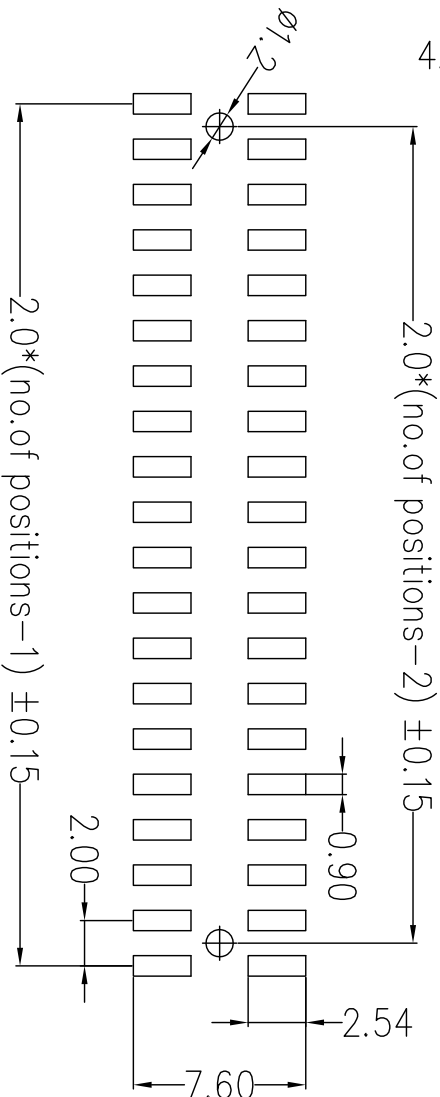

F200-H45-DSMT - XX - X - X

C : With Cap

No.of Contacts P : With Post

Recommended PCB Layout

TOLERANCE .X ±.XX .XX ±.XX .XXX ±.XX	DRAWER <i>Chiu Chuan Yiu</i>	NAME SynLight 日亮電子科技有限公司 <i>Sun-Light Electronic Technologies Inc.</i>
	CHECK <i>Shi-Jung Yiu</i>	
	DESIGNED <i>Chiu Chuan Yiu</i>	
UNITS : mm	APPROVAL <i>Shue-Teng Yiu</i>	PART NO. F200-H45-DSMT-XX
	DATE 10 / 23 / 2010	
	SCALE FREE	
SIZE A4		SHEET 1 OF 1
REV.		REV. F200-H45-DSMT

2.0mm Female Header H:4.5 SMT type
雙排Double row