

REV.	DESCRIPTION	DATE

NOTE:





Material:

- 1.Housing: Polyester, UL94V-0.
- 2.Terminal: Copper alloy.
- 3.Plating: Gold-plated.

Electrical:

- 1.Current rating: 3 Amp.
- 2.Contact resistance: 30mΩ Max.
- 3.Insulator resistance: 5000MΩ Min.
- 4.Dielectri withstand: AC 1000 V.
- 5.Temperature: -40°C ~ +105°C

Available pins: 03~40 contacts

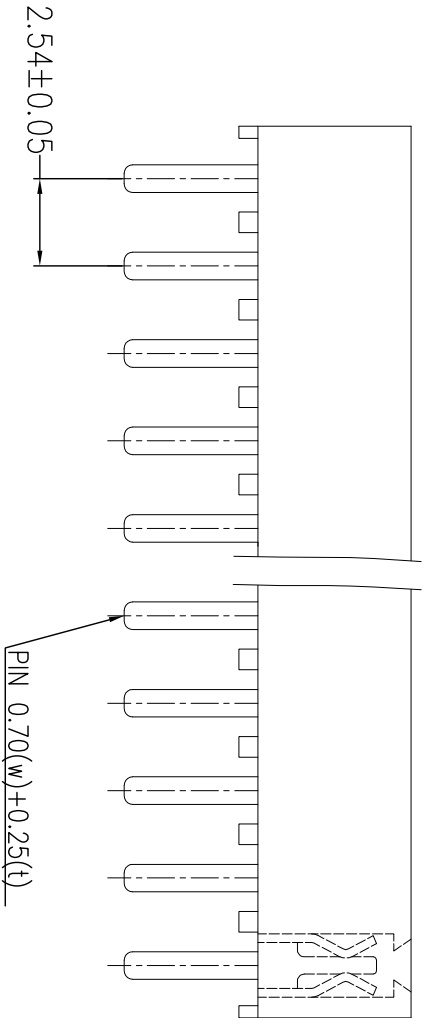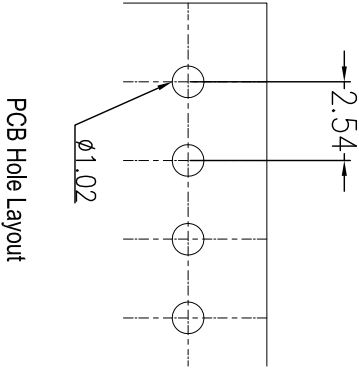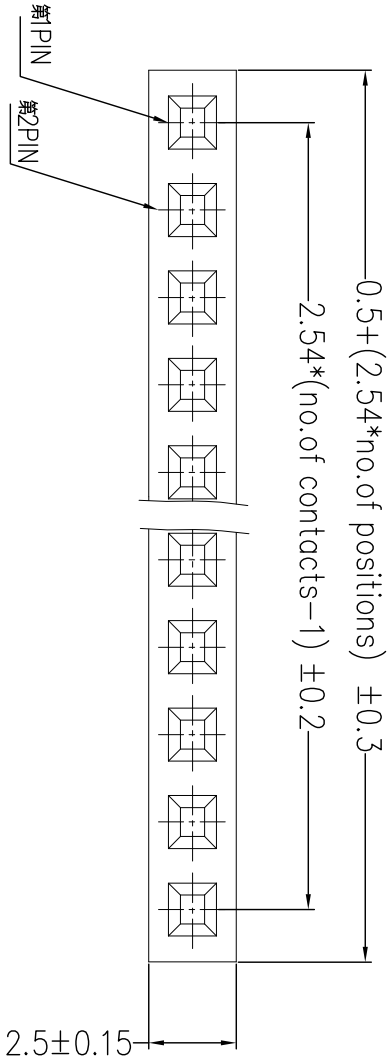

TOLERANCE .X ±.XX .XX ±.XX .XXX ±.XX	DRAWER	 日 亮 電 子 科 技 有 限 公 司 <i>Sun-light Electronic Technologies Inc.</i>
	CHECK	
	DESIGNED	
 UNITS : mm	APPROVAL	PART NO. F2540-H50-SDIP-XX DRAW NO. F2540-H50-SDIP NAME 2.54mm Female Header H:5.0 W:2.50 180°
	DATE	
	SIZE	
SCALE	FREE	A4
SHEET		1 OF 1
REV.		A